


Spec sheet for STP38A0300100S

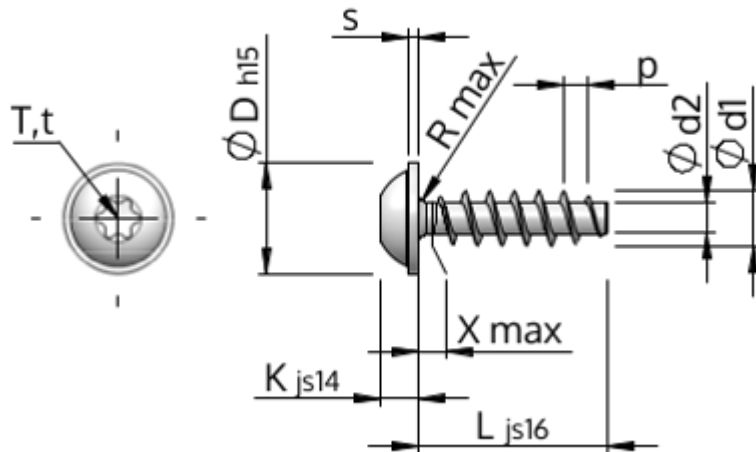

Item Number		STP38A0300100S
Head		KN1038
Material		steel, hardened 10.9
Surface		zinc-plated 5-7 µm, baked, blue / transparent passivated
Thread outside-Ø	<b>d1</b>	3,00 <sup>+0,14</sup> mm
Thread core-Ø	<b>d2</b>	1,66 mm
Thread-pitch	<b>p</b>	1,34 mm
Length	<b>L</b>	10,00 mm
Head-Ø	<b>D</b>	6,00 <sub>-0,48</sub> mm
Head height	<b>K</b>	2,100 ±0,125 mm
Flange Thickness	<b>S</b>	0,6 mm
Thread run-out	<b>X max.</b>	1,50 mm
Radius	<b>R max.</b>	0,35 mm
Hexalobular Drive (T)		T10
Penetration Depth	<b>t min.</b>	1,00 mm
Penetration Depth	<b>t max.</b>	1,30 mm
Thread		STS
Weight		0,517 kg/1000 pcs.
Customs tariff no		73 181 499