


Spec sheet for STP39A0250180S

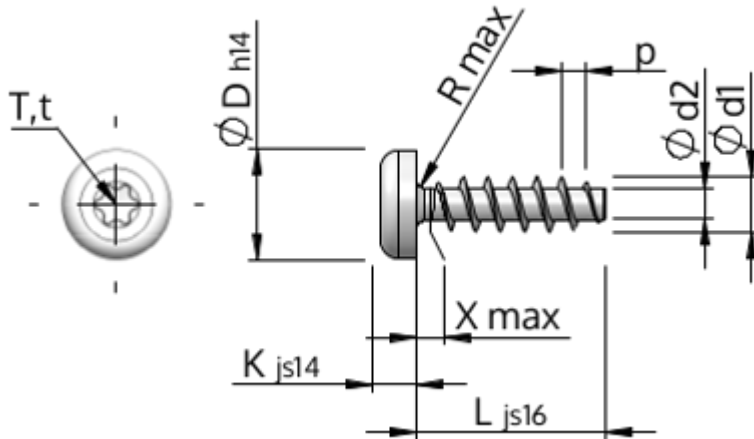

Item Number		STP39A0250180S
Head		KN1039
Material		steel, hardened 10.9
Surface		zinc-plated 5-7 $\mu\text{m}$ , baked, blue / transparent passivated
Thread outside- $\emptyset$	<b>d1</b>	2,50 $^{+0,14}$ mm
Thread core- $\emptyset$	<b>d2</b>	1,40 mm
Thread-pitch	<b>p</b>	1,12 mm
Length	<b>L</b>	18,00 mm
Head- $\emptyset$	<b>D</b>	4,20 $_{-0,30}$ mm
Head height	<b>K</b>	1,600 $\pm 0,125$ mm
Thread run-out	<b>X max.</b>	1,30 mm
Radius	<b>R max.</b>	0,30 mm
Hexalobular Drive (T)		T8
Penetration Depth	<b>t min.</b>	0,60 mm
Penetration Depth	<b>t max.</b>	0,90 mm
Thread		STS
Weight		0,503 kg/1000 pcs.
Customs tariff no		73 181 499