


Spec sheet for STP410200150S

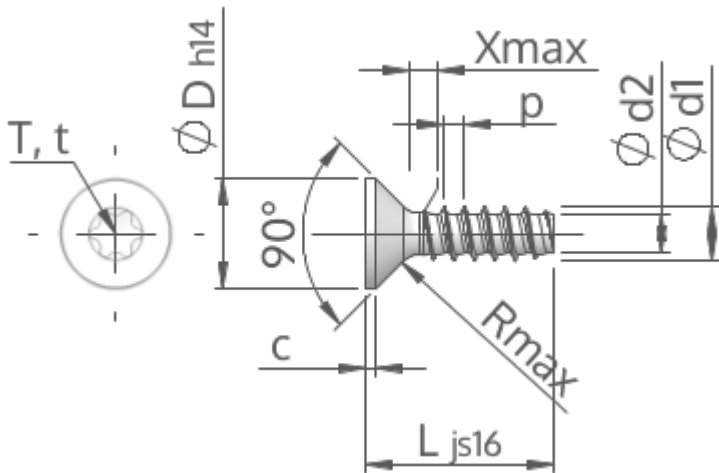

Item Number		STP410200150S
Head		KN6041
Material		steel, hardened 10.9
Surface		zinc-plated 5-7 μm , baked, blue / transparent passivated
Thread outside- \varnothing	d1	2,00 $^{+0,08}$ mm
Thread core- \varnothing	d2	1,36 mm
Thread-pitch	p	0,78 mm
Length	L	15,00 mm
Head- \varnothing	D	4,00 $_{-0,30}$ mm
Cylindrical head height	C max.	0,35 mm
Thread run-out	X max.	1,00 mm
Radius	R max.	0,80 mm
Hexalobular Drive (T)		T6
Penetration Depth	t min.	0,50 mm
Penetration Depth	t max.	0,65 mm
Thread		STS-plus
Weight		0,275 kg/1000 pcs.
Customs tariff no		73 181 499